


GP elastisk axelkoppling

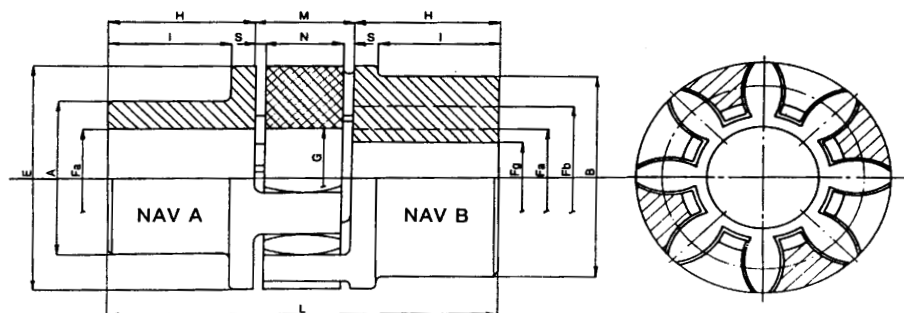

Nav material
Gjutjärn GG 25
alt. Aluminium

Flexibelt element
92 Shore vitt alt.
98 Shore rött

Tekniska data, Nav Material Gjutjärn GG 25, Dimensioner (m m)

Storlek	MvN (Nm) 92 Shore vitt	MvN (Nm) 98 Shore röd	Max axelhål		Förbor- ning Fg i nav B	E	A	B	L 1)	H	M 1)	S	N	I	G	Vikt kg komplett koppling med		
			Nav A Fa 2)	Nav B Fb												nav A/A	nav B/B	nav A/B
GP19/24	11,5	17	0	24	15	40	40	40	66	25	16	2	12	-	18	-	0,33	-
GP24/32	40	60	24	32	21	55	40	55	78	30	18	2	14	24	27	0,6	0,96	0,78
GP28/38	115	160	28	38	27	65	48	65	90	35	20	2,5	15	28	30	0,97	1,61	1,29
GP38/45	225	325	38	45	37	80	66	80	114	45	24	3	18	37	38	2,08	2,66	2,37
GP42/55	310	450	42	55	41	95	75	95	126	50	26	3	20	40	46	3,21	4,0	3,61
GP48/60	360	525	48	60	47	105	85	105	140	56	28	3,5	21	45	51	4,41	5,5	5,0
GP55/70	430	625	55	70	53	120	98	120	160	65	30	4	22	52	60	6,64	8,10	7,4
GP65/75	525	640	65	75	63	135	115	135	185	75	35	4,5	26	61	68	10,1	11,6	10,9
GP75/90	1250	1465	75	90	73	160	135	160	210	85	40	5	30	69	80	16,0	19,4	17,7
GP90/100	3050	3600	90	100	88	200	160	180	245	100	45	5,5	34	81	100	27,5	31,7	29,6

Art nr halva	Pris Nav A SEK	Pris Nav B SEK	Art nr element 92° vitt	Art nr element 98° röd	Pris element SEK	Pris komplett koppling SEK			Bearbetning axelhål-kilspår SEK Nto/halva	Stoppskruv SEK Netto/st
						A/A	B/B	A/B		
GP19/B	-	80	GP19E	GP19ER	28	-	188	-	64	31
GP24A/B	105	126	GP24E	GP24ER	31	241	283	262	64	31
GP28A/B	157	172	GP28E	GP28ER	47	361	391	376	93	31
GP38A/B	237	270	GP38E	GP38ER	76	550	616	583	105	31
GP42A/B	356	384	GP42E	GP42ER	150	862	918	890	114	40
GP48A/B	454	478	GP48E	GP48ER	167	1 075	1 123	1 099	114	40
GP55A/B	672	736	GP55E	GP55ER	289	1 633	1 761	1 697	135	40
GP65A/B	878	932	GP65E	GP65ER	398	2 154	2 262	2 208	167	40
GP75A/B	1 448	1 539	GP75E	GP75ER	588	3 484	3 666	3 575	224	70
GP90A/B	2 505	2 721	GP90E	GP90ER	855	5 865	6 297	6 081	301	70

En komplett koppling
består av:
2 st nav + 1 st element

Ex: 2 x GP24A +
1 x GP24E

Tekniska data, Nav Material Aluminium, Dimensioner (m m)

Storlek	MvN (Nm) 92 Shore vitt	MvN (Nm) 98 Shore röd	Max axelhål		Förbor- ning Fg i Nav B	E	A	B	L 1)	H	M 1)	S	N	I	G	Vikt kg komplett koppling med		
			Nav A Fa 2)	Nav B Fb												nav A/A	nav B/B	nav A/B
GP19/24	11,5	17		24	4	40	40	40	66	25	16	2	12		18	-	0,14	-
GP24/32	40	60	24	32	22	55	40	55	78	30	18	2	14	24	27	0,25	0,32	0,27
GP28/38	115	160	28	38	26	65	48	65	90	35	20	2,5	15	28	30	0,40	0,54	0,47
GP38/45	225	325	38	45	36	80	66	77	114	45	24	3	18	37	38	0,85	0,96	0,90
GP42/55	310	450		55		95		95	126	50	26	3	20		46	-	1,70	-
GP48/60	360	525		60		105		105	140	56	28	3,5	21		51	-	1,90	-

Art nr halva	Pris Nav A SEK	Pris Nav B SEK	Art nr element 92° vitt	Art nr element 98° röd	Pris element SEK	Pris komplett koppling SEK			Bearbetning axelhål-kilspår SEK Nto/halva	Stoppskruv SEK Netto/st
						A/A	B/B	A/B		
GP19Al/B	-	60	GP19E	GP19ER	28	-	148	-	64	31
GP24AlA/B	70	79	GP24E	GP24ER	31	171	189	180	64	31
GP28AlA/B	98	116	GP28E	GP28ER	47	243	279	261	93	31
GP38AlA/B	200	261	GP38E	GP38ER	76	476	598	537	105	31
GP42Al/B	-	376	GP42E	GP42ER	150	-	902	-	114	40
GP48Al/B	-	443	GP48E	GP48ER	167	-	1 053	-	114	40

1) Mått L och M är
minimimått
2) Nav A är oborrt